



OLTENS

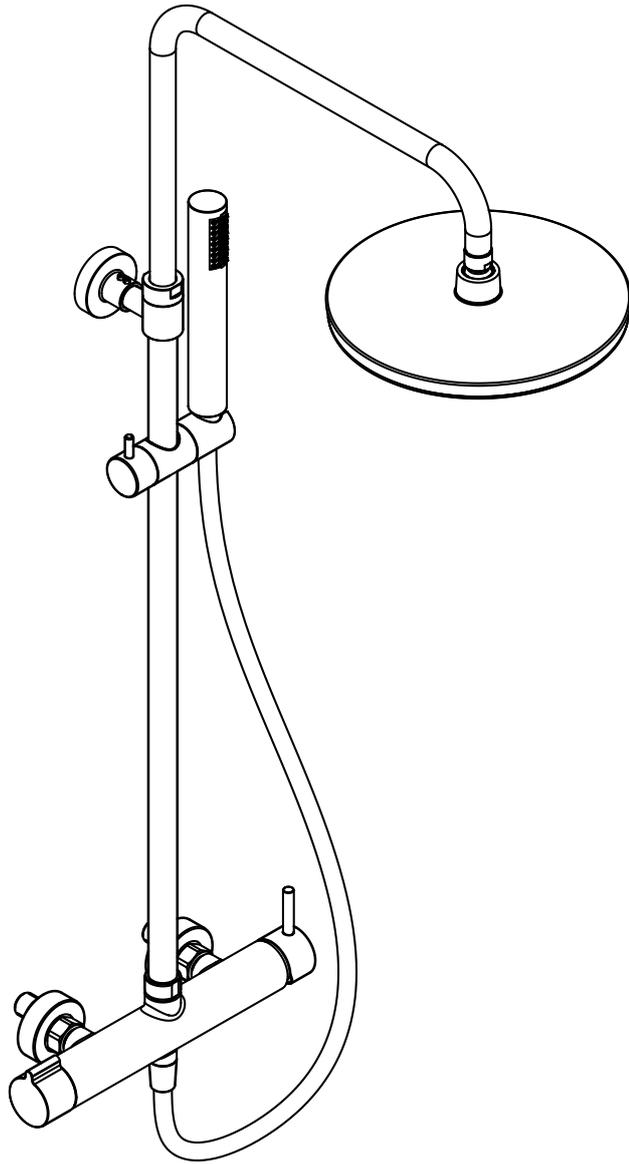



Molle

1. Determine hot and cold water connection while maintaining the connection distance and mixer tap level according to the drawing.

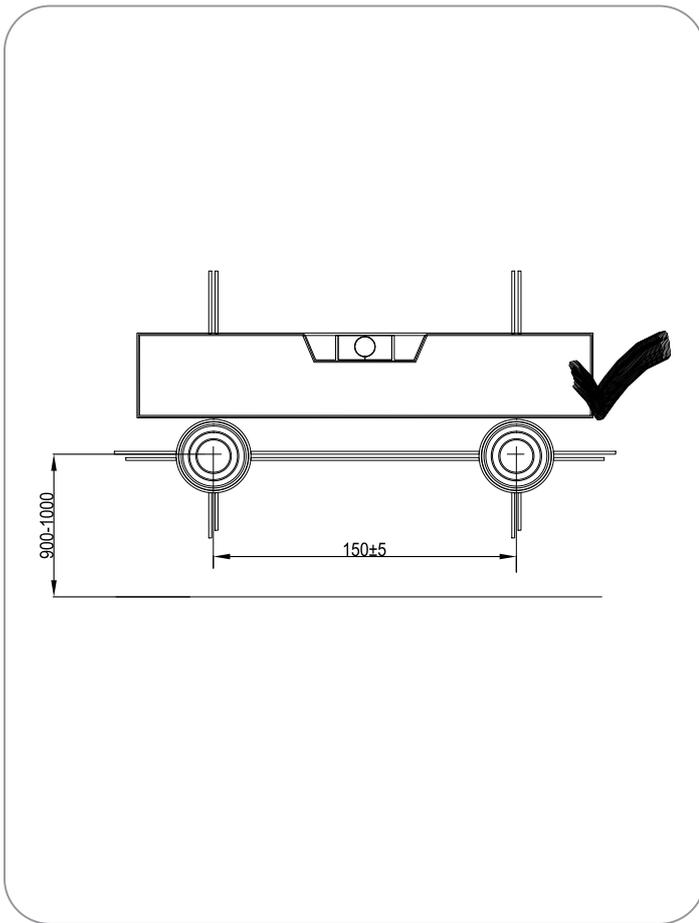


2. Clean the holes before connecting the mixer tap.

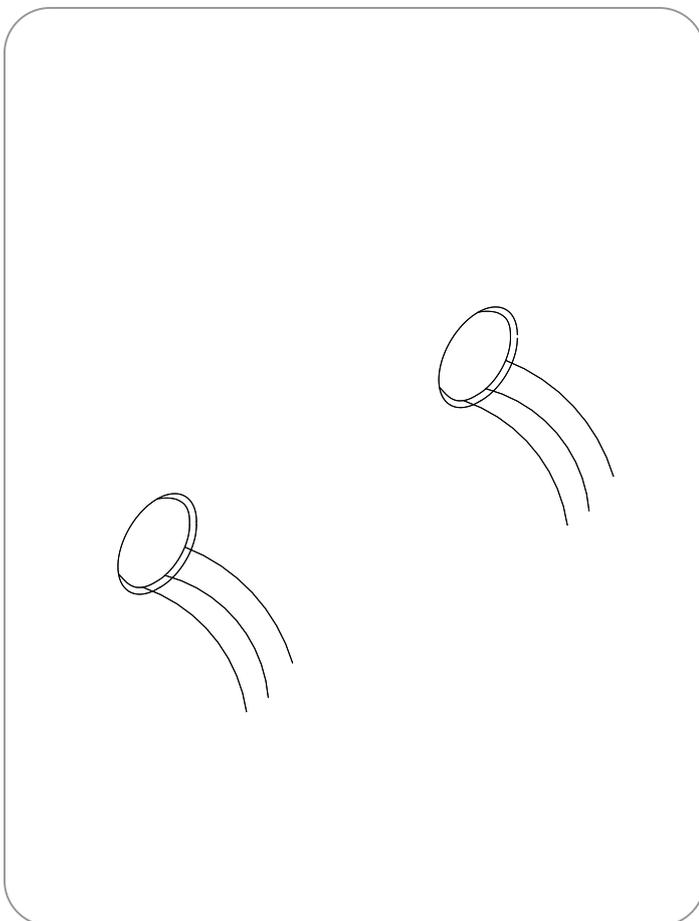

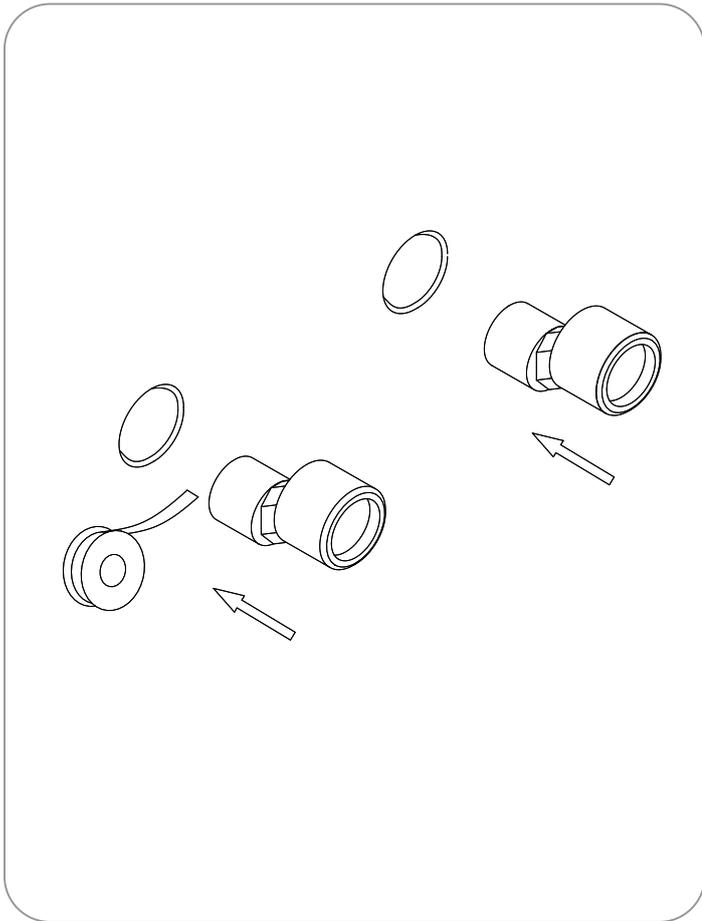


3. Installation of offset connectors of the thermostatic mixer tap

1. Wrap the narrower end of the offset connector with Teflon tape counterclockwise.
2. Next, connect to hot and cold water outlets, as appropriate.

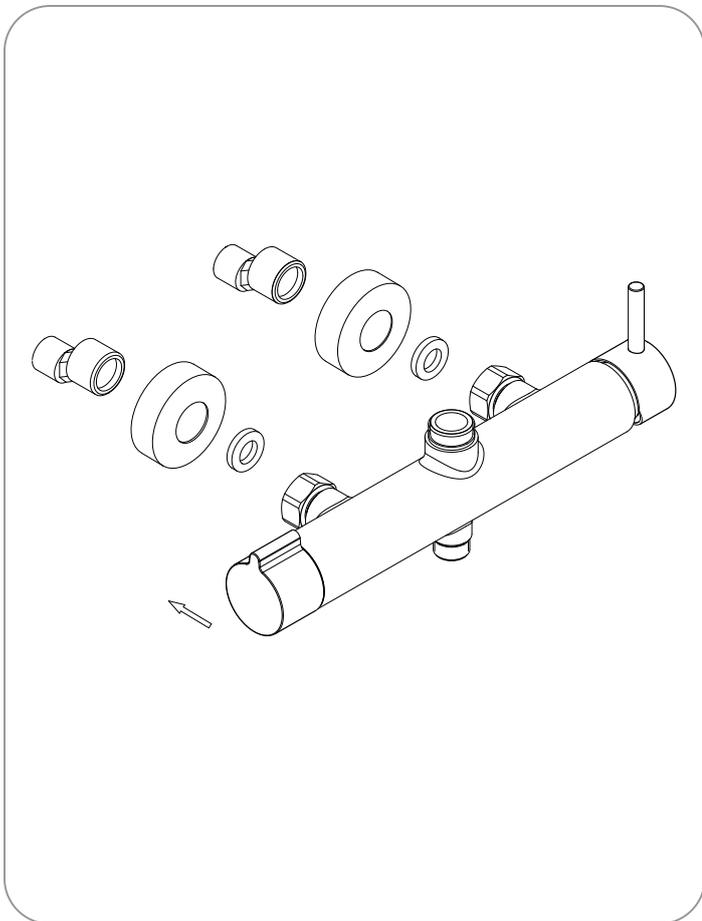



4. 1. Place the rosettes on the parts of offset connectors protruding from the wall and fix them to the wall.
2. Tighten the mixer tap nuts to offset connectors with a nut wrench.

5. The mixer tap installation is complete.

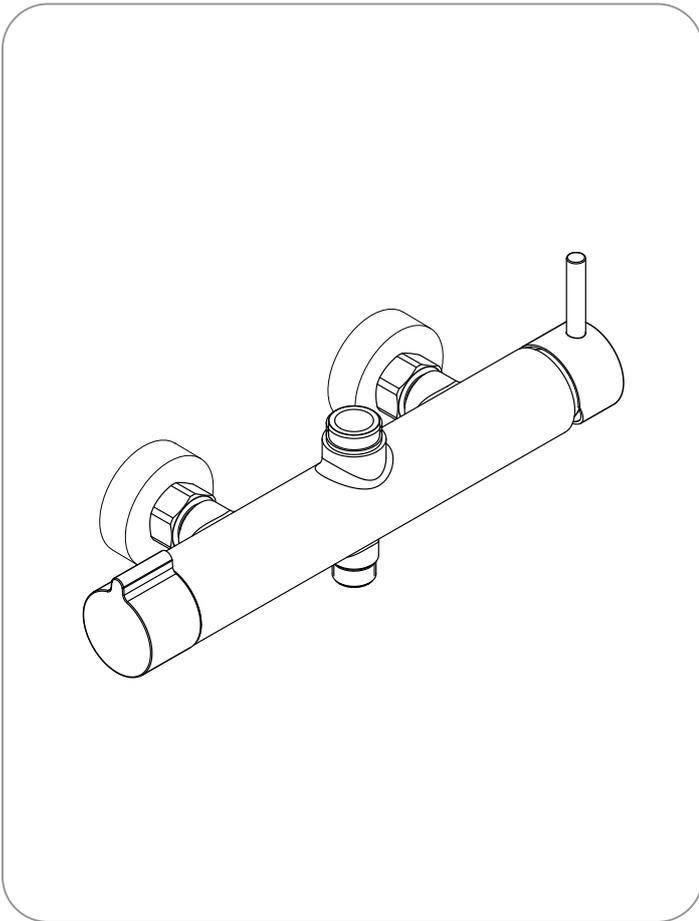


6. Install the tube to the mixer tap.

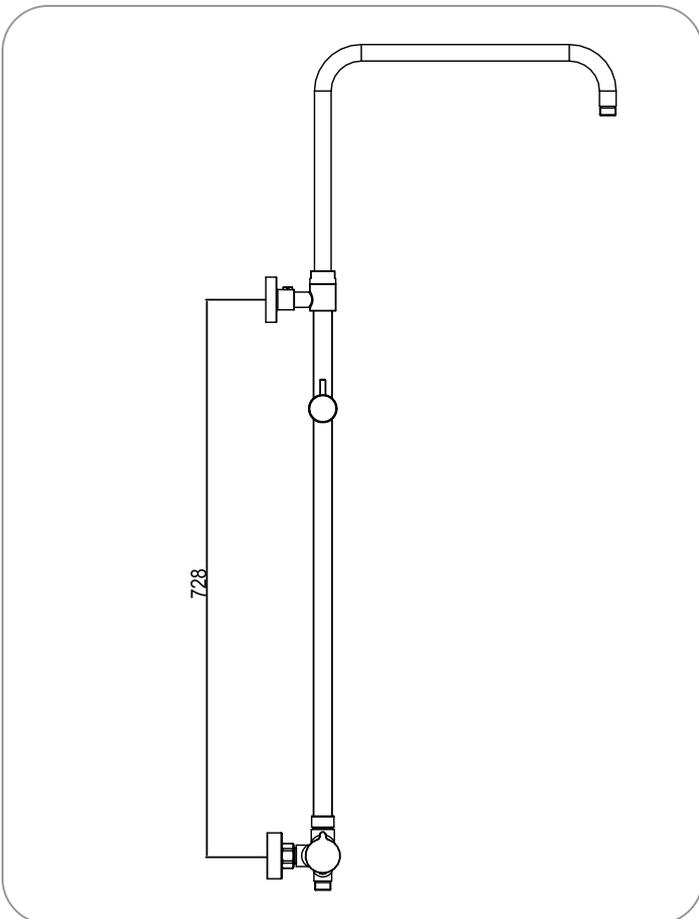

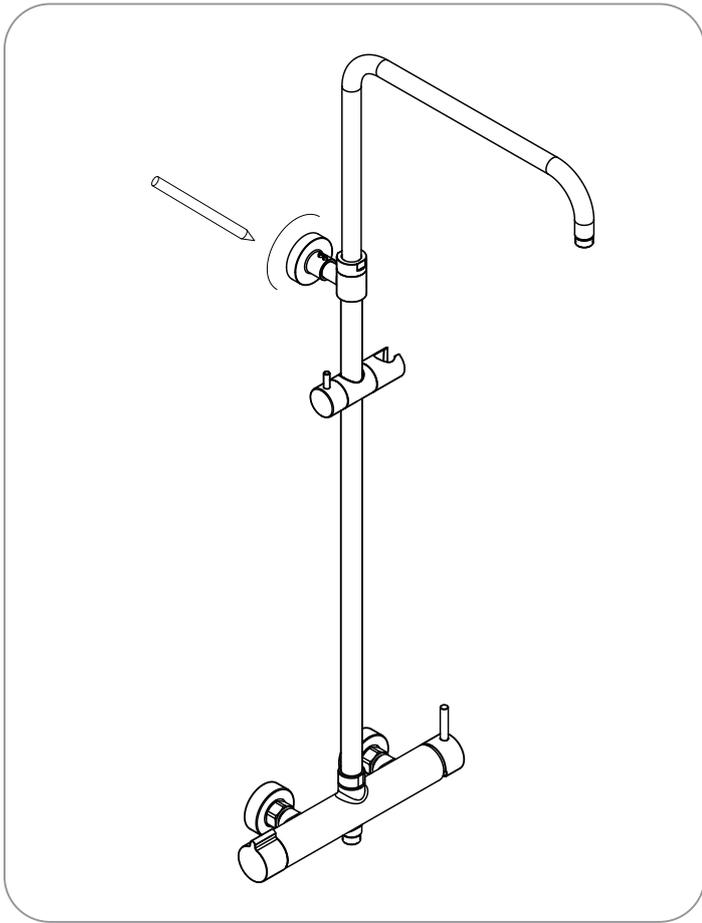


7. Mark the installation location of the tube mounting bracket on the wall.

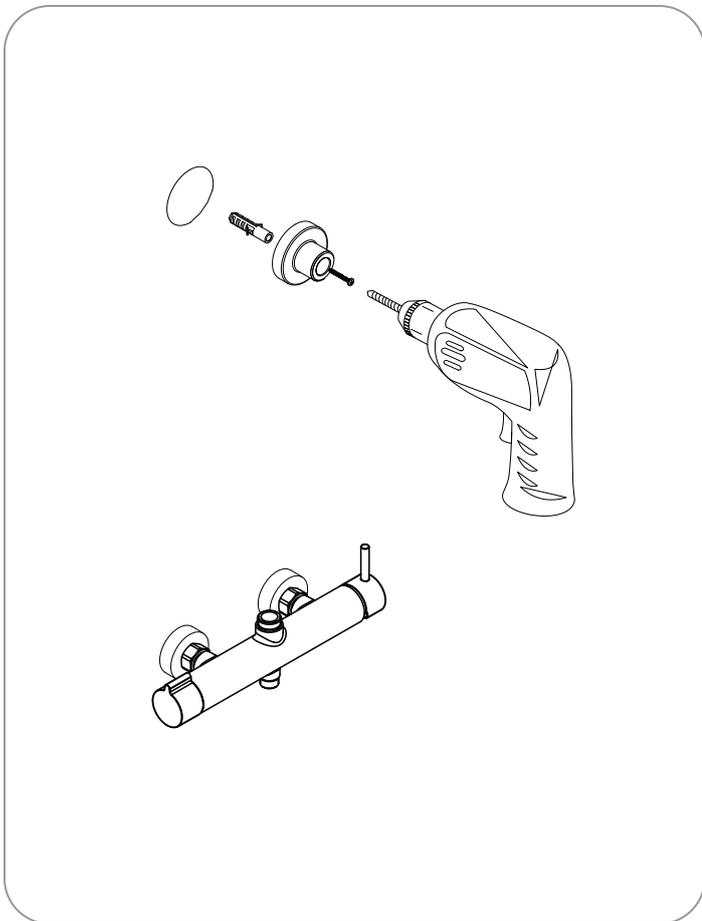


8. Fasten the mounting bracket to the wall with a screw.

9. Attach the tube according to the figure.

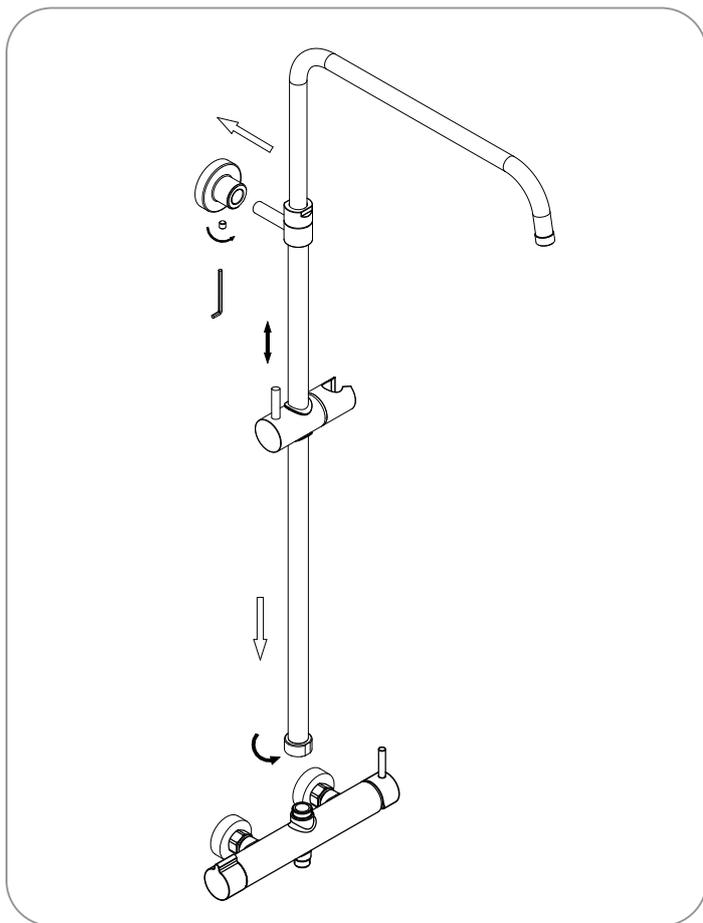

10. Installation of the rain shower head, hand-held shower spray and hose.

1. Place the seal in the round nut of the shower head. Connect the shower head to the curved tube to avoid any leaks.
2. Place a seal in each narrow hose nut. Screw one end of the shower hose to the hand-held shower spray. Place the hand-held shower spray in the holder.
3. Connect the other end of the shower hose to the lower outlet of the thermostatic mixer tap.

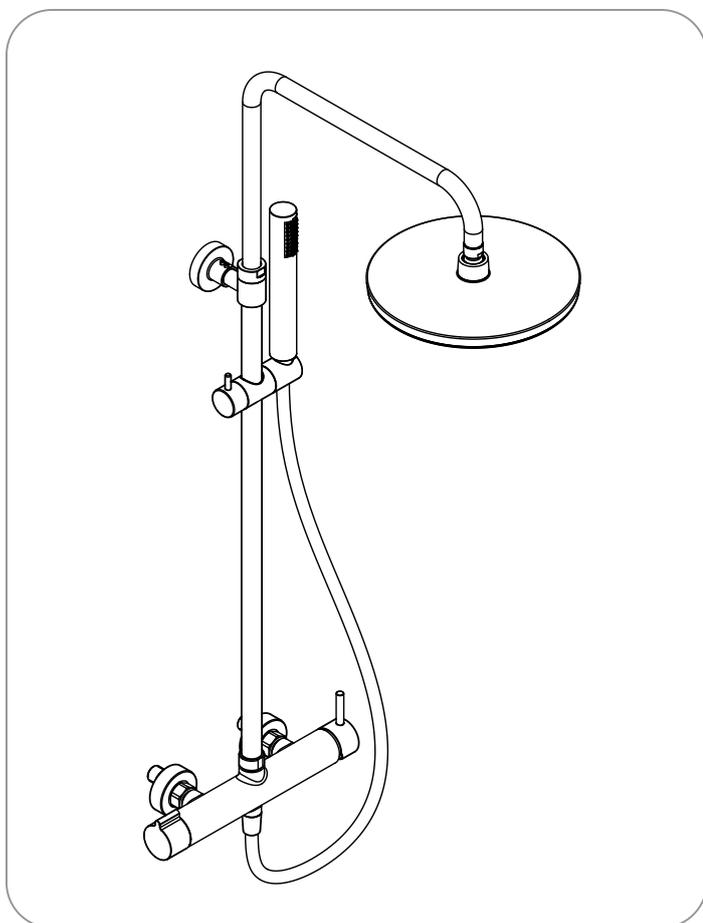

Notes to the installation instructions:

- Do not disassemble any parts attached together, as they had been assembled and checked before they were released by the manufacturer.
- To avoid damaging the thermostatic mixer tap, prior to installation the piping system should be flushed to remove any debris, such as sand, limescale and sludge.
- Before installation, make sure that there are no concealed cables and pipes in the wall where you intend to drill.
- After the installation, please ensure that all connections are tight and there are no leaks.

Technical data

Working pressure **0.1–0.6 MPa**

Recommended pressure **0.2–0.5 MPa**

Maximum hot water temperature **85°C**

Recommended hot water temperature **55°C – 65°C**

Ensure that the hot and cold water connections are installed correctly.

Care and maintenance

Flush with clean water and wipe with a dry, soft cloth.

For heavier deposits, it is recommended to use special tap cleaning agents, preferably professional Oltens products from the NanoCare and NanoShine series.

Never use agents containing alcohol, disinfectants, solvents and strong bases.

Never clean the surface of the tap with rough cloths or cleaning agents containing abrasive materials and acids.

