



OLTENS

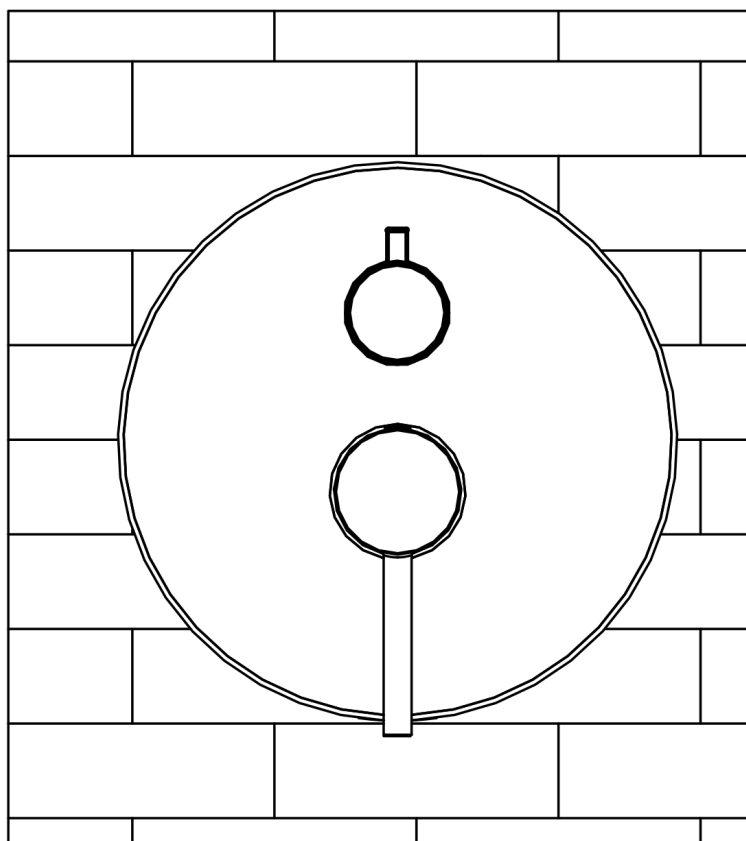

3-WAY MIXER TAP


- installation instruction

1

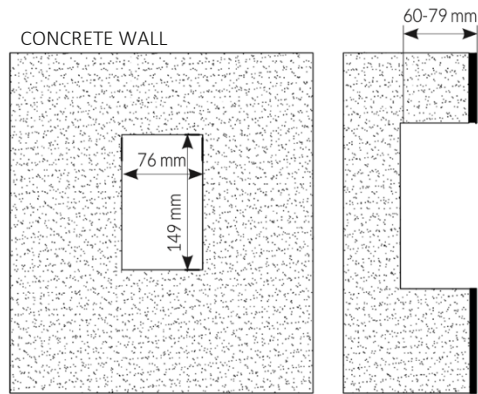


Create a recess in the wall as shown in the figure below.
Includes tile thickness.

2

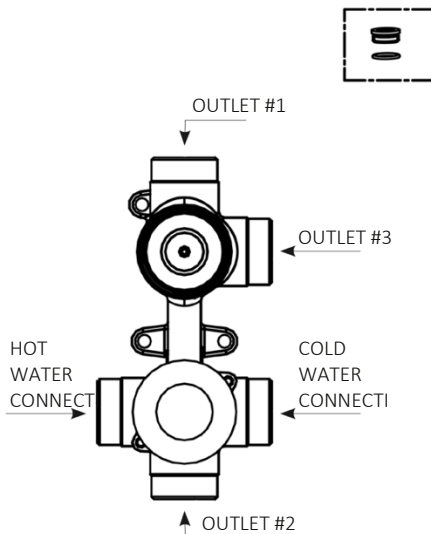


The contractor can block water outlets as needed.
The mixer tap can have 1, 2 or 3 outlets.

3

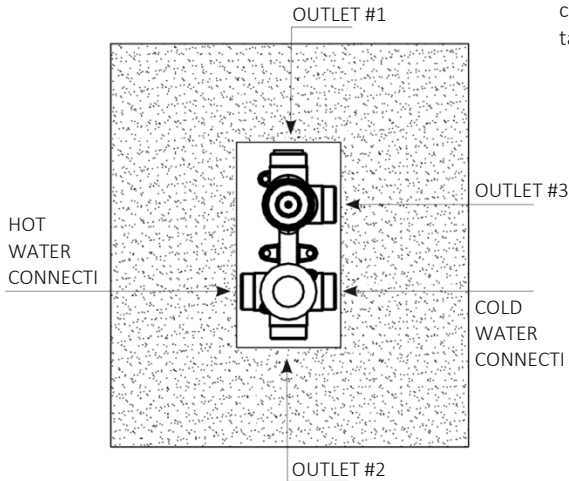

Connect hot and cold water connections to the concealed mixer tap body.


4

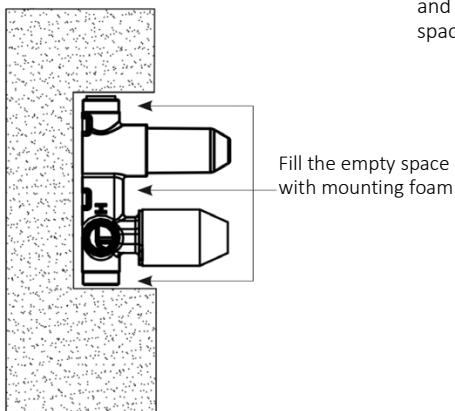

Perform a leak test of the concealed valve to ensure there are no leaks at each installation connection. If the valve and connections are tight, fill empty spaces with mounting foam.


5

Apply tiles to the wall.

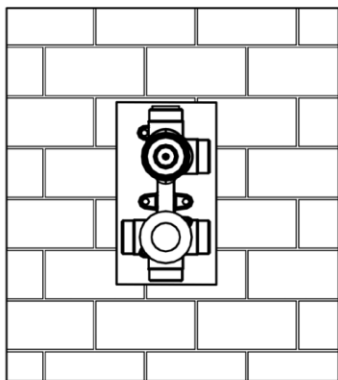


6

Remove protective covers from valves.

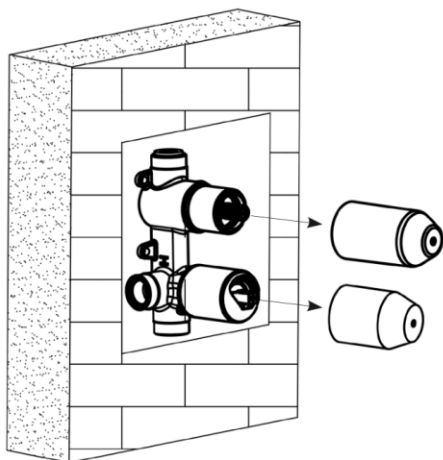


7

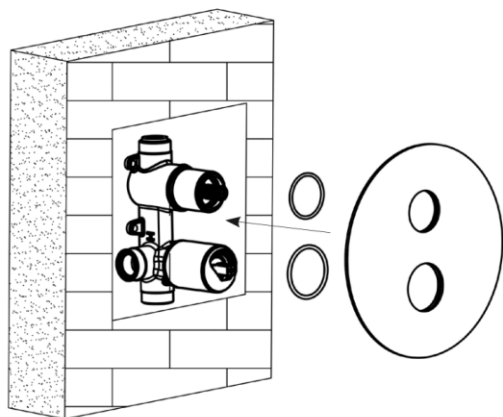

Place the mixer tap rosette (cover plate) on the valves as shown in the figure.


8

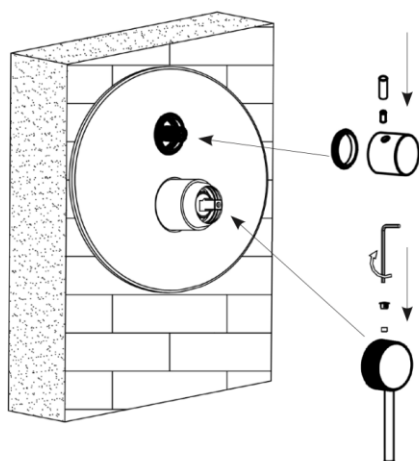

Ensure the valve is in closed position, then secure the mixer tap handle and function switch using an Allen key and then put on the caps.

9

The mixer tap installation is complete.

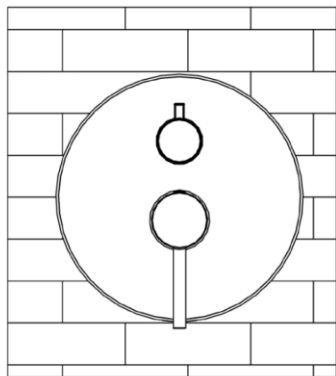

Note! The drawings are for illustration and instruction purpose only. The appearance of the mixer tap may be different from that seen in the drawings.

Technical information


Maximum pressure **1 MPa**

Recommended pressure **0.1–0.5 MPa**

Maximum temperature of hot water **90°C**

Recommended temperature of hot water **65°C**

Check whether the installation of hot and cold water was done correctly.

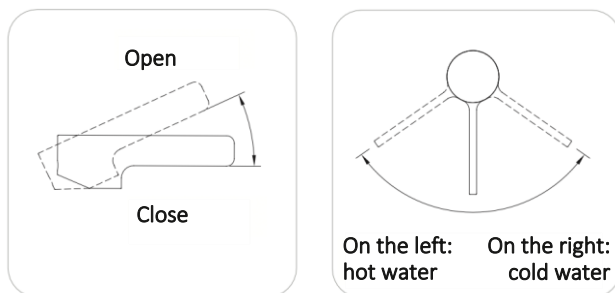

Operation

To start the water flow and fluently adjust its rate, turn the handle vertically upwards.

To increase water temperature, turn the handle left, and to reduce – turn the handle right.

Positioning the handle on the extreme left results in the flow of hot water only, while placing it on the extreme right – the flow of cold water only.

Care and maintenance

Flush with clean water and wipe with a dry, soft cloth.

For heavier deposits, it is recommended to use special tap cleaning agents, preferably professional Oltens products from the NanoCare and NanoShine series.

Never use agents containing alcohol, disinfectants, solvents and strong bases.

Never clean the surface of the mixer tap with rough cloths or cleaning agents containing abrasive materials and acids.

